


# ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

---

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China  
Email:wp@cnjingganrefractory.com/sdwenping@163.com  
Contact:Rose Tel/Wechat:+86-13275332819  
Tel:86-533-4188518 Fax:86-533-4188518

## High Density HDPE Plastic Pipe

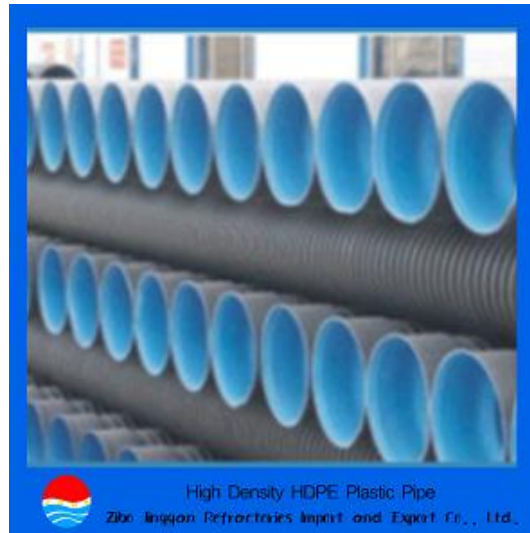

1.Description: HDPE Double wall corrugated pipe, abbreviated as PE corrugated pipe, is a new type of light-weight pipe made of high-density polyethylene. It has the characteristics of light weight, high pressure resistance, good toughness, fast construction, long service life, etc. its excellent pipe wall structure design greatly reduces the cost compared with other structural pipe materials, and the connection is convenient, reliable and largely replaces the concrete pipe And cast iron pipes are widely used at home and abroad.

2. Characteristics:

- 1) Excellent structure and strong compression resistance
- 2) Smooth inner wall, large flow
- 3) Convenient connection, well sealed interface, zero leakage, no scaling, corrosion resistance, It is the ideal "green tube".
- 4) Long service life, up to more than 50 years

# ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

---

- 5) At 15 ft / s, the wear resistance is 3-5 times higher than that of ordinary steel pipe.
  - 6) Low temperature resistance, good impact resistance, product embrittlement temperature - 70 °C
  - 7) Chemical stability is good, except for a few strong oxidants, most chemical media do not damage it
  - 8) The product raw material is green environmental protection raw material, non-toxic, non corrosive, non scaling, recyclable
3. Application: drainage, sewage pipeline system engineering, farmland water delivery, drainage engineering, chemical industry, mine fluid transportation and ventilation, underground pipeline and communication cable protective casing
4. Specification: DN/1D200mm~DN/1D800mm, 8 kinds of specifications, 16 models,

## 5. Main performance parameters

ITEM	UNIT	TECHNCIAL INDEX
Creep rate	%	≤4
Change after heating		No bubble, delamination or cracking
Ring stiffness	Kn/m <sup>2</sup>	≥6
Impact property	TIR,%	≤10
Ring flexibility		The sample is smooth without reverse bending, fracture or separation of two walls

## 6. Engineering photos



# ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

---



7. Good feedback of product use effect, the products have been exported to Oman, the United States, Morocco and India.

8. The manufacturer is a professional manufacturer and can provide complete product index test reports or third-party test reports.

Do you want to find a professional supplier of refractory products?

Do you want to find a professional supplier of graphite electrodes?

# ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

---

Do you want to find a stable and credible supplier?

Then let's contact with jinggan company

Contact me:

Email:wp@cnjingganrefractory.com/sdwenping@163.com

TEL: 86-0533-4188518 / FAX: 86-0533-4188518

Rose:+86-13275332819(wechat/whatsapp number)