

SHANDONG TAIRAN IMPORT AND EXPORT CO.,LTD

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China
Email:wp@cnjingganrefractory.com/sdwenping@163.com
Contact:Rose Tel/Wechat:+86-13275332819
Tel:86-533-4188518 Fax:86-533-4188518

Anti Rust Oil Series



1,Performance parameters of Anti Rust Oil



Item	TR-307	TR-207
proportion	0.8 ± 0.05	0.8 ± 0.05
salt mist resistance	75	48
hot-wet	750	480
method	Spray, dip, brush	Spray, dip, brush
temperature	ordinary temperature	ordinary temperature
Time min	proper	proper
features	With water displacement, film type, more than one year of antirust	With water displacement, very thin dry film, no fingerprints, 3-6 months rust

2. Introduction: antirust oil is a reddish brown oil solvent with antirust function. It is composed of oil soluble buffer, base oil and auxiliary additives. It has many kinds and slight smell. For the surface oxidation, phosphating, blackening products are painted on the surface, impregnated with antirust oil, and then packaged with plastic. It has the advantages of simple operation, convenient use, low cost and good effect. The shelf life of antirust oil is 2-3 years, and it should be stored in a cool place

3. Packing method: 25kg, 50kg, 200kg

SHANDONG TAIRAN IMPORT AND EXPORT CO.,LTD

4. Application legend of antirust oil

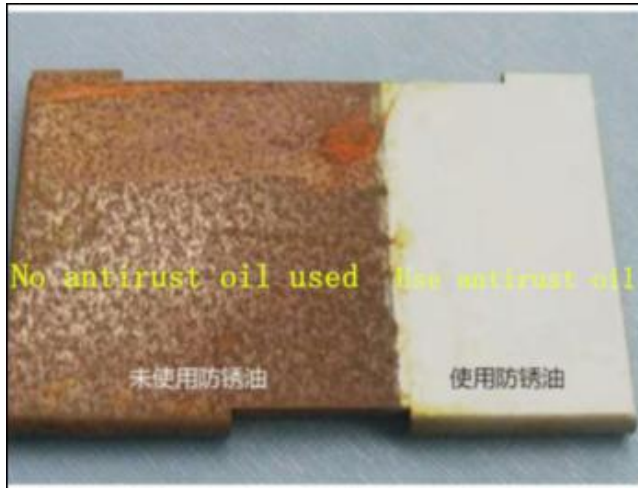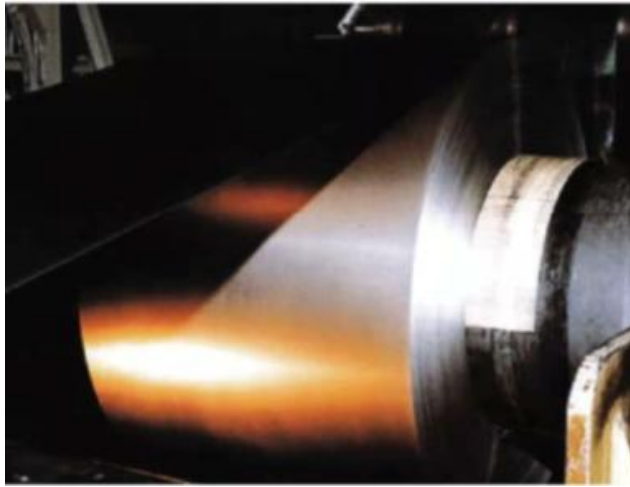

5, Good feedback of product use effect, the products have been exported to South Korea, Brazil, England

6, We are a professional supplier, who can provide customers with free product

SHANDONG TAIRAN IMPORT AND EXPORT CO.,LTD

technology, use and other issues

Do you want to find a professional supplier of Anti Rust Oil products?

Do you want to find a stable and credible supplier?

Then please contact with us

Contact me:

Email:wp@cnjingganrefractory.com/sdwenping@163.com

TEL: 86-0533-4188518 / **FAX:** 86-0533-4188518

Rose:+86-13275332819(wechat/whatsapp number)